



# Work Truck

## Tech Specs



### IdlePro® Alternators

<b>System Voltage</b>	12V
<b>Temperature Rating</b>	-40°C to 125°C
<b>Diodes</b>	12*
<b>Lamp Driver</b>	High or low side driver
<b>Mounting</b>	J180 Hinge Mount Pad Mount
<b>Output</b>	240-Amp
<b>Rotation</b>	Clockwise
<b>Weight</b>	22 lbs. / 10 kg
	3-Year/Unlimited Mileage**




### Additional Specifications

PRESTOLITE	VOLTS	AMPS	MOUNTING
A160210	12	170	PAD
A160211	12	170	J180
AVI2800J	12	190	J180
AVI2800P	12	190	PAD
A160207	12	210	PAD
A160208	12	210	J180
A160203	12	240	PAD
A160204	12	240	J180

## Output Curves

Vehicles that frequently stop and start, while also powering larger-than-usual electrical draws, require alternators that can ensure full battery recovery between stops, even if the vehicle never gets back up to full speed. The only important rating is the amount of power the alternator can produce while the engine is idling.

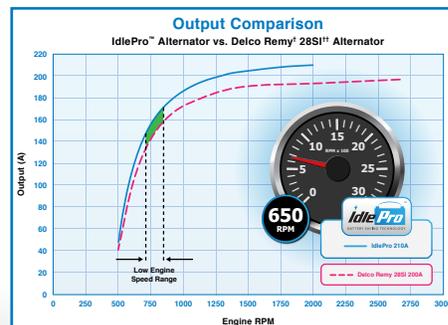

\*Certain models \*\*Check with your Prestolite representative for more details

\*Delco Remy is a registered trademark of General Motors Corporation, licensed to BorgWarner PDS (Anderson) L.L.C. \*\*28SI is a registered trademarks of BorgWarner.



# Work Truck

## Tech Specs

### PowerPro Extreme® 5 Starters

<b>Engine Size</b>	Up to 10L
<b>System Voltage</b>	12V
<b>Rotation</b>	Clockwise
<b>Mounting</b>	SAE #1, SAE #3
<b>Output</b>	5kW
<b>Flange</b>	Fixed
<b>Weight</b>	21.5 lbs / 9.8 kg
<b>Operating Temperature</b>	-40°C to 125°C
	Work Truck Applications: 2-year/Unlimited Mileage**



### Additional Specifications

LEECE-NEVILLE	DESCRIPTION	TEETH	OCP	WARRANTY
M95301H	Cummins ISC/ISL, International DT466, DT530, DT570, Maxx Force 9&10	12	No	 Work Truck Applications, 2-Year/ Unlimited Mileage
M95303H	Cummins ISB 6.7L	10	No	
M95307H	Cummins ISB 6.7L or applications needing additional ground stud	10	No	
M95309H	Detroit Diesel DD5 and DD8	11	No	
M95312H	Cummins ISC/ISL for applications needing additional ground stud	12	No	

\*\* Check with your Prestolite representative for more details