




# Mining Vehicle

## Tech Specs



### IdlePro Extreme® Alternators

<b>System Voltage</b>	24V
<b>Temperature Rating</b>	-40°C to 125°C
<b>Diodes</b>	12
<b>Lamp Driver</b>	High or low side driver
<b>Mounting</b>	J180 Hinge Mount Pad Mount
<b>Output</b>	250-Amp to 275-Amp
<b>Rotation</b>	Clockwise
<b>Weight</b>	39 lbs. / 17.7 kg
<b>Warranty</b>	1-Year/3,000 Hours

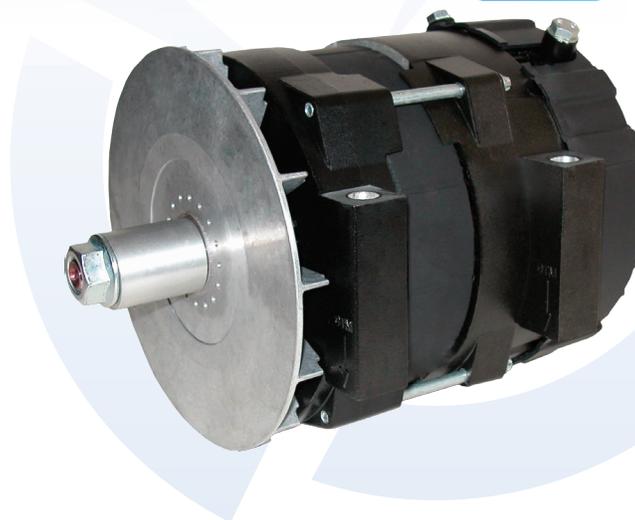

### Additional Specifications

PRESTOLITE	VOLTS	AMPS	MOUNTING
BLD4102H	24	250	J180
BLD4105	24	275	J180
BLP4101H	24	250	Pad
BLP4106	24	275	Pad



### Lightweight Design to Ease Service Concerns

At 39 lbs., the IdlePro Extreme alternator allows for versatility in the field for service concerns. Mining operators can utilize a one-person service and installation process versus a heavier alternator that requires a two-person service and installation team.



# Mining Vehicle

## Tech Specs

### PowerPro Extreme® 12 Starters

<b>Engine Size</b>	Up to 40L, 24V
<b>Rotation</b>	Clockwise
<b>Mounting</b>	SAE #3
<b>Output</b>	12kW
<b>Flange</b>	Rotatable
<b>Weight</b>	36 lbs. / 16.3 kg
<b>Operating Temperature</b>	-40°C to 125°C
<b>Warranty</b>	1-Year/5,000 Hours



### Additional Specifications

LEECE-NEVILLE	DESCRIPTION	TEETH	OCP	WARRANTY
M128713	Various off-road vehicles 12L to 40L engines	12	Yes	1-Year/5,000 Hours
M128737	Various off-road vehicles 12L to 40L engines	11	Yes	
M128738	Various off-road vehicles 12L to 40L engines	11	Yes	
M128739	Various off-road vehicles 12L to 40L engines	11	Yes	



### Long-Lasting Power You Can Count On

Comparable starters will give you a service life of 2,000 to 3,500 service hours. The PowerPro Extreme 12 is proven to last almost twice as long as that, significantly reducing your replacement costs.



### Lightweight Design to Ease Service Concerns

At 36 lbs., the PowerPro Extreme starter allows for versatility in the field for service concerns. Mining operators can utilize a one-person service and installation process versus a heavier starter that requires a two-person service and installation team.